

H79L12 Three-terminal negative voltage regulator

FEATURES

Maximum Output current

I_{OM} : 0.1 A

Output voltage

V_O : -12 V

Continuous total dissipation

P_D : 0.625 W

TO-92

1. GND

2. IN

3. OUT




ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_I	-35	V
Operating Junction Temperature Range	T_{OPR}	0~+125	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($V_I=19V, I_O=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_O	25°C	-11.5	-12	-12.5	V
		-14.5V ≤ V_I ≤ -27V, $I_O=1mA \sim 40mA$	-11.4	-12	-12.6	V
		$I_O=1mA \sim 70mA$	-11.4	-12	-12.6	V
Load Regulation	ΔV_O	$I_O=1mA \sim 100mA$		24	100	mV
		$I_O=1mA \sim 40mA$		15	50	mV
Line regulation	ΔV_O	-14.5V ≤ V_I ≤ -27V		50	250	mV
		-16V ≤ V_I ≤ -27V		40	200	mV
Quiescent Current	I_q	25°C			6.5	mA
Quiescent Current Change	ΔI_q	-16V ≤ V_I ≤ -27V			1.5	mA
	ΔI_q	$1mA \leq I_O \leq 40mA$			0.1	mA
Output Noise Voltage	V_N	10Hz ≤ f ≤ 100KHz		80		uV
Ripple Rejection	RR	-15V ≤ V_I ≤ -25V, f=120Hz	37	42		dB
Dropout Voltage	V_d	25°C		1.7		V

TYPICAL APPLICATION

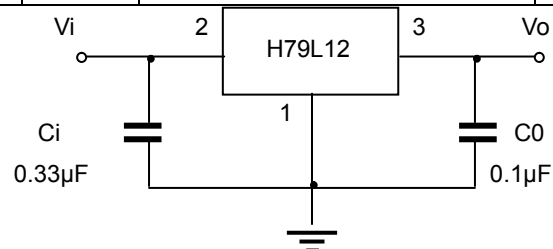

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

H79LXX

