


## 2A Positive voltage regulators

### Feature summary

- Output current to 2A
- Output voltages of 5; 7.5; 9; 10; 12; 15; 18; 24V
- Thermal overload protection
- Short circuit protection
- Output transition SOA protection


### Description

The L78S00 series of three-terminal positive regulators is available in TO-220 and TO-3 packages and with several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 2A output

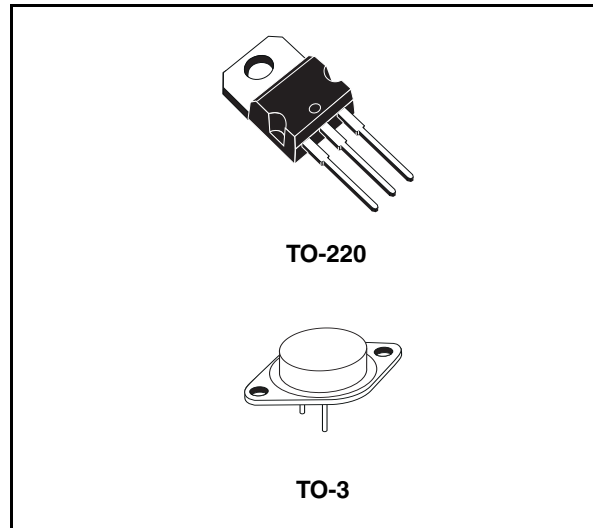

current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

### Schematic diagram

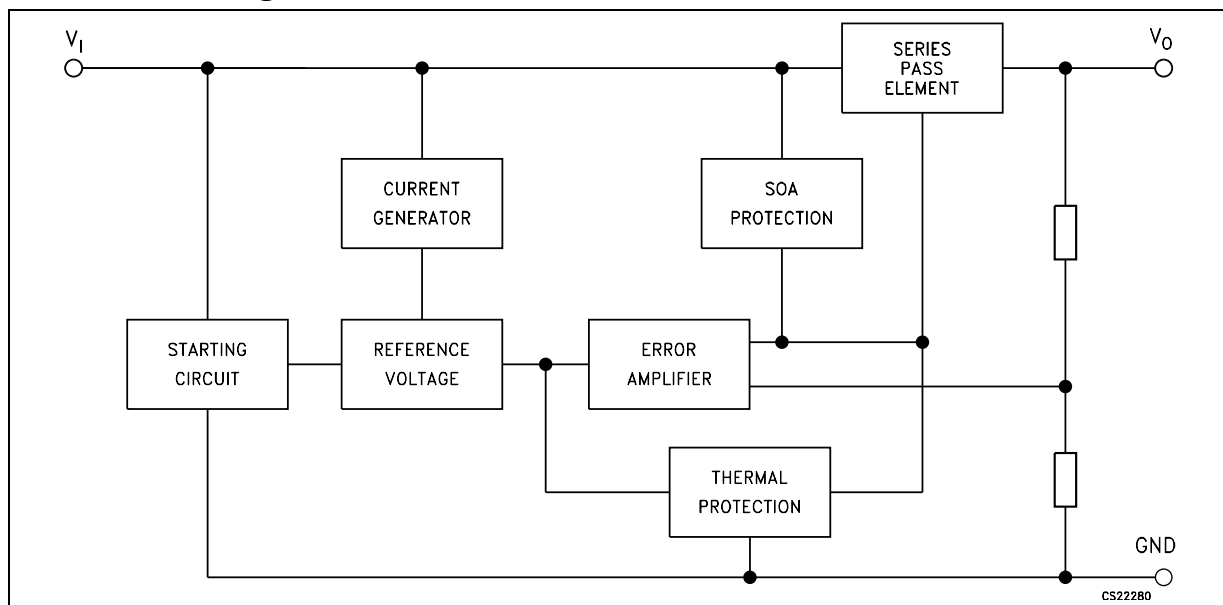

---

## Contents

|          |                                         |           |
|----------|-----------------------------------------|-----------|
| <b>1</b> | <b>Pin configuration .....</b>          | <b>3</b>  |
| <b>2</b> | <b>Maximum ratings .....</b>            | <b>4</b>  |
| <b>3</b> | <b>Test circuits .....</b>              | <b>5</b>  |
| <b>4</b> | <b>Electrical characteristics .....</b> | <b>6</b>  |
| <b>5</b> | <b>Typical performance .....</b>        | <b>19</b> |
| <b>6</b> | <b>Package mechanical data .....</b>    | <b>30</b> |
| <b>7</b> | <b>Order code .....</b>                 | <b>33</b> |
| <b>8</b> | <b>Revision history .....</b>           | <b>34</b> |

# 1 Pin configuration

Figure 1. Pin connections (top view)


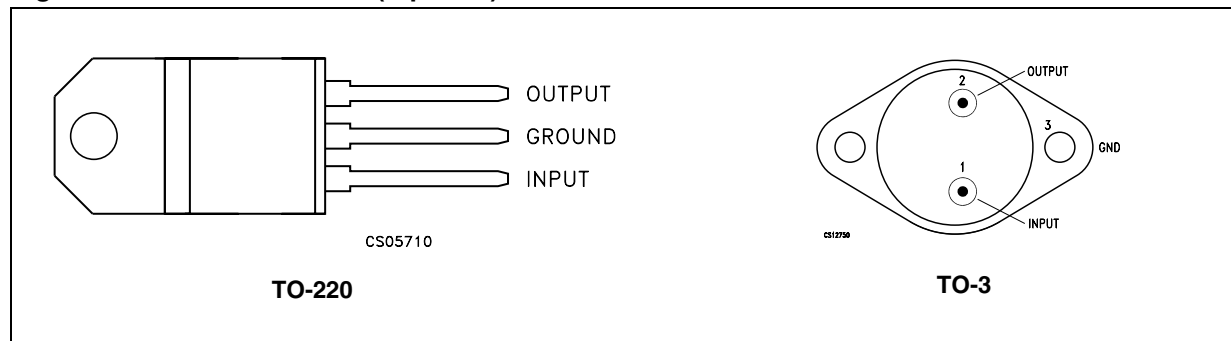


Figure 2. Schematic diagram

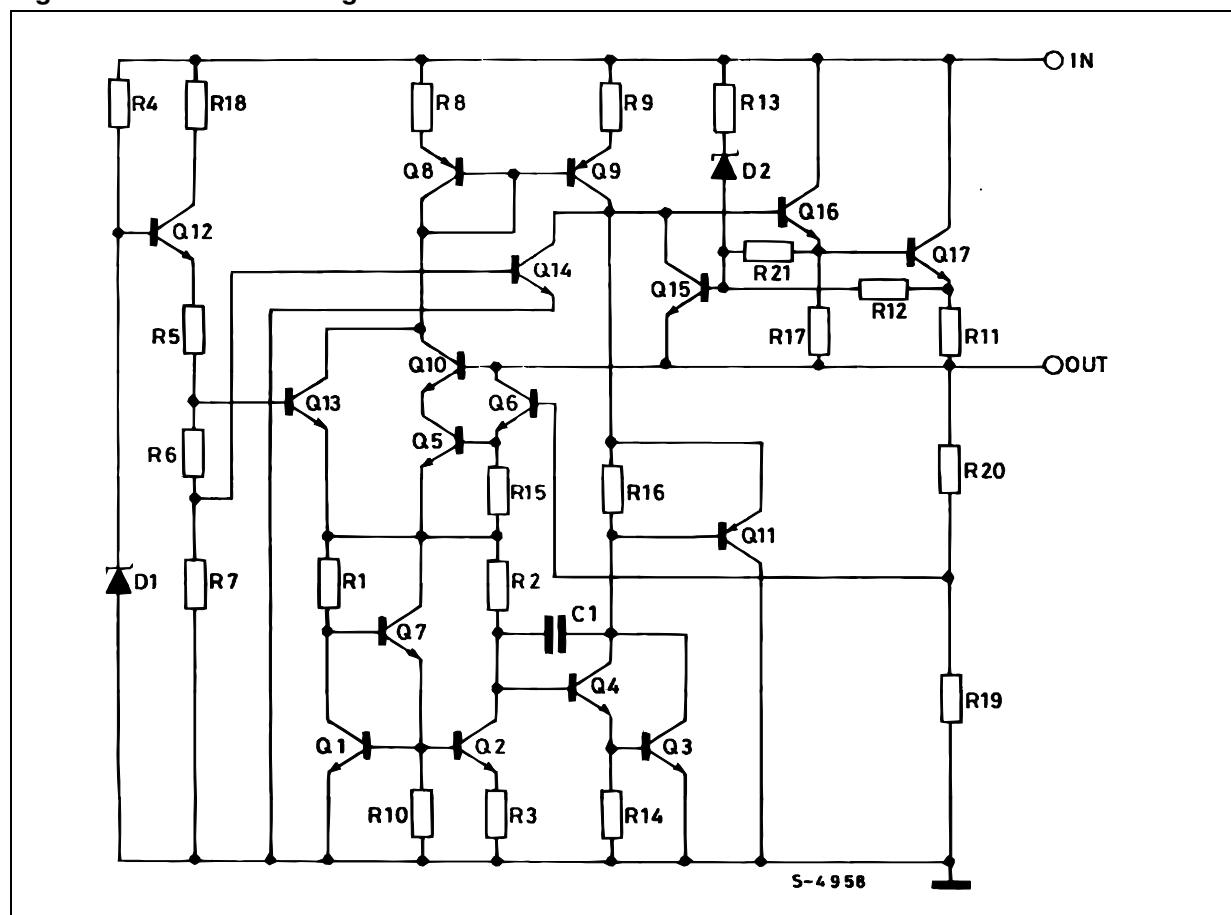

## 2 Maximum ratings

Table 1. Absolute maximum ratings


| Symbol    | Parameter                            |                      | Value              | Unit |
|-----------|--------------------------------------|----------------------|--------------------|------|
| $V_I$     | DC Input voltage                     | for $V_O = 5$ to 18V | 35                 | V    |
|           |                                      | for $V_O = 24$ V     | 40                 |      |
| $I_O$     | Output current                       |                      | Internally Limited |      |
| $P_D$     | Power dissipation                    |                      | Internally Limited |      |
| $T_{STG}$ | Storage temperature range            |                      | -65 to 150         | °C   |
| $T_{OP}$  | Operating junction temperature range | for L78S00           | -55 to 150         | °C   |
|           |                                      | for L78S00C          | 0 to 150           |      |

*Note:* Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

Table 2. Thermal Data

| Symbol     | Parameter                           | TO-220 | TO-3 | Unit |
|------------|-------------------------------------|--------|------|------|
| $R_{thJC}$ | Thermal resistance junction-case    | 5      | 4    | °C/W |
| $R_{thJA}$ | Thermal resistance junction-ambient | 50     | 35   | °C/W |

Figure 3. Application circuits

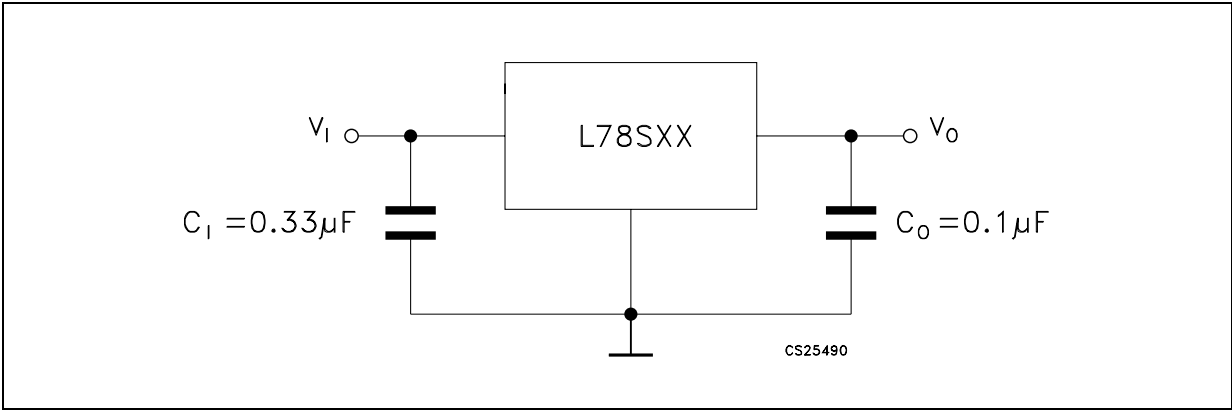

### 3 Test circuits

Figure 4. DC Parameter

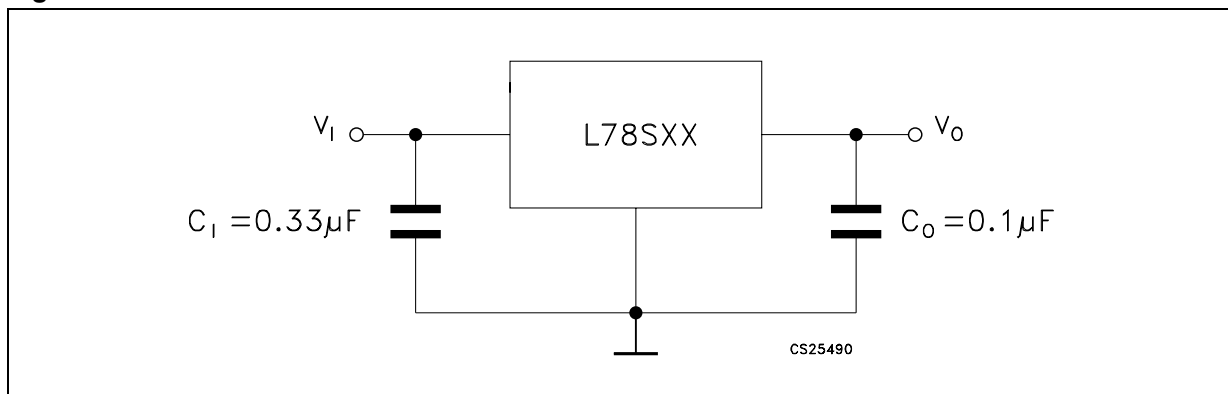


Figure 5. Load regulation


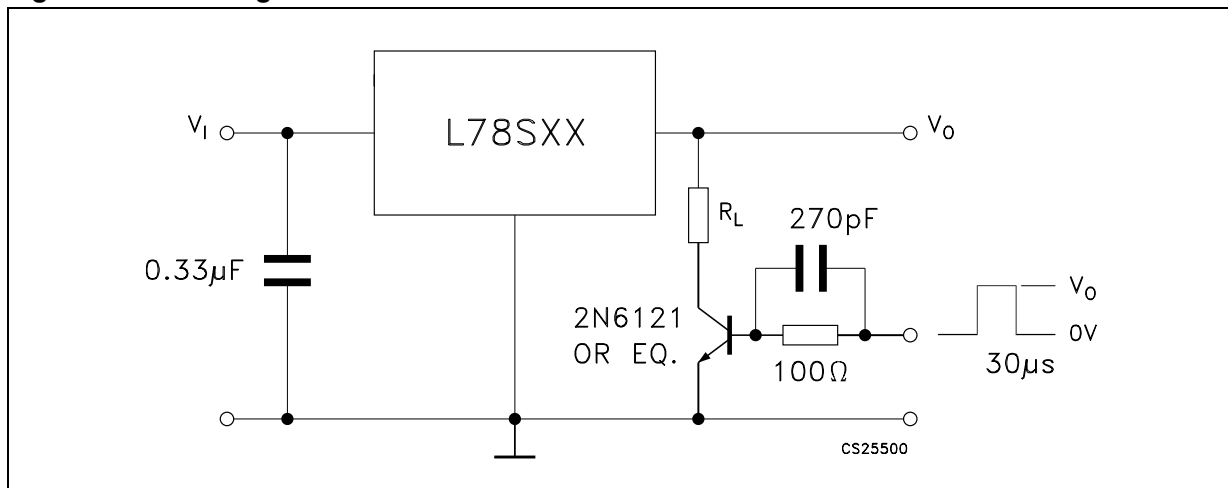


Figure 6. Ripple rejection

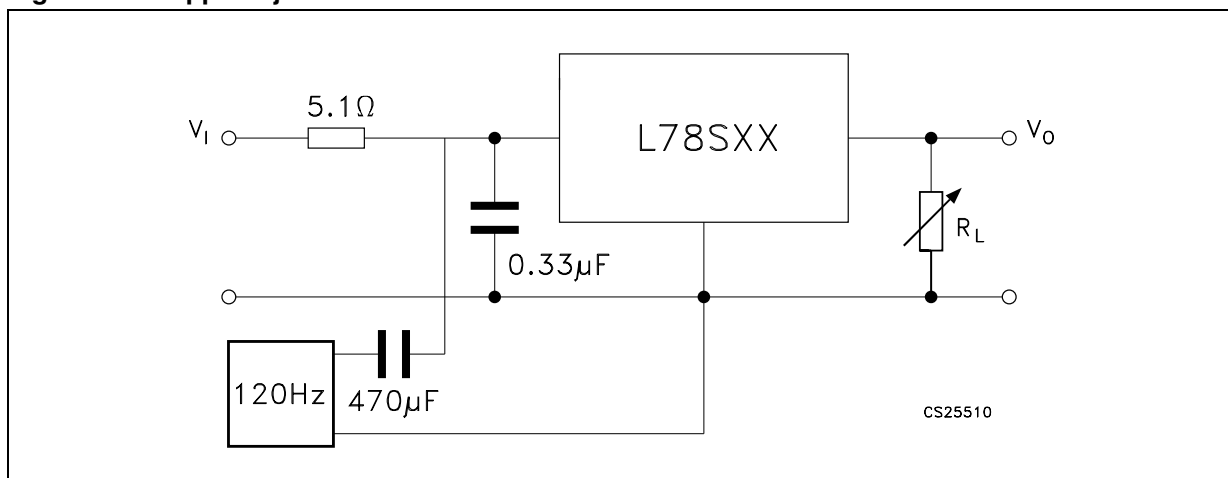

## 4 Electrical characteristics

**Table 3. Electrical characteristics of L78S05** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 10\text{V}$ ,  $I_O = 500\text{mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                       | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|-----------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                       | 4.8  | 5    | 5.2  | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{A}$ , $V_I = 7\text{V}$                                 | 4.75 | 5    | 5.25 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 7$ to $25\text{V}$                                             |      |      | 100  | mV                   |
|                       |                            | $V_I = 8$ to $25\text{V}$                                             |      |      | 50   |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{mA}$ to $2\text{A}$                                    |      |      | 100  | mV                   |
| $I_d$                 | Quiescent current          |                                                                       |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA}$ to $1\text{A}$                                    |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 7$ to $25\text{V}$ , $I_O = 20\text{mA}$                       |      |      | 1.3  |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = -55^\circ\text{C}$ to $150^\circ\text{C}$ |      | -1.1 |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | $B = 10\text{Hz}$ to $100\text{kHz}$                                  |      | 40   |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | $f = 120\text{Hz}$                                                    | 60   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{A}$                                                  | 8    |      |      | V                    |
| $R_O$                 | Output resistance          | $f = 1\text{kHz}$                                                     |      | 17   |      | $\text{m}\Omega$     |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                                    |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                       |      | 3    |      | A                    |

**Table 4. Electrical characteristics of L78S75** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 12.5\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                     | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|---------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                     | 7.15 | 7.5  | 7.9  | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 9.5\text{V}$                            | 7.1  | 7.5  | 7.95 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 9.5\text{ to }25\text{V}$                                    |      |      | 120  | mV                   |
|                       |                            | $V_I = 10.5\text{ to }20\text{V}$                                   |      |      | 60   |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }2\text{A}$                                   |      |      | 120  | mV                   |
| $I_d$                 | Quiescent current          |                                                                     |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{A}$                                    |      |      | 0.5  | mA                   |
|                       |                            | $I_O = 20\text{mA}$ , $V_I = 9.5\text{ to }25\text{V}$              |      |      | 1.3  |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = -55^\circ\text{C to }150^\circ\text{C}$ |      | -0.8 |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                  |      | 52   |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                           | 54   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1.5\text{A}$                                              | 10.5 |      |      | V                    |
| $R_O$                 | Output resistance          | f = 1 KHz                                                           |      | 16   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                                  |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                     |      | 3    |      | A                    |

**Table 5. Electrical characteristics of L78S09** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 14\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                     | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|---------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                     | 8.65 | 9    | 9.35 | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 11\text{V}$                             | 8.6  | 9    | 9.4  | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 11\text{ to }25\text{V}$                                     |      |      | 130  | mV                   |
|                       |                            | $V_I = 11\text{ to }20\text{V}$                                     |      |      | 65   |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }2\text{A}$                                   |      |      | 130  | mV                   |
| $I_d$                 | Quiescent current          |                                                                     |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{A}$                                    |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 11\text{ to }25\text{ V}$ , $I_O = 20\text{mA}$              |      |      | 1.3  |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = -55^\circ\text{C to }150^\circ\text{C}$ |      | -1   |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                  |      | 60   |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                           | 53   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1.5\text{A}$                                              | 12   |      |      | V                    |
| $R_O$                 | Output resistance          | f = 1 KHz                                                           |      | 17   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                                  |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                     |      | 3    |      | A                    |

**Table 6. Electrical characteristics of L78S10** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 15\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                     | Min. | Typ. | Max. | Unit          |
|-----------------------|----------------------------|---------------------------------------------------------------------|------|------|------|---------------|
| $V_O$                 | Output voltage             |                                                                     | 9.5  | 10   | 10.5 | V             |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 12.5\text{V}$                           | 9.4  | 10   | 10.6 | V             |
| $\Delta V_O$          | Line regulation            | $V_I = 12.5\text{ to }30\text{V}$                                   |      |      | 200  | mV            |
|                       |                            | $V_I = 14\text{ to }22\text{V}$                                     |      |      | 100  |               |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }2\text{ A}$                                  |      |      | 150  | mV            |
| $I_d$                 | Quiescent current          |                                                                     |      |      | 8    | mA            |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{ A}$                                   |      |      | 0.5  | mA            |
|                       |                            | $V_I = 12.5\text{ to }30\text{ V}$ , $I_O = 20\text{mA}$            |      |      | 1    |               |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = -55^\circ\text{C to }150^\circ\text{C}$ |      | -1   |      | mV/°C         |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                  |      | 65   |      | $\mu\text{V}$ |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                           | 53   |      |      | dB            |
| $V_d$                 | Dropout voltage            | $I_O \leq 1.5\text{A}$                                              | 13   |      |      | V             |
| $R_O$                 | Output resistance          | f = 1 KHz                                                           |      | 17   |      | m $\Omega$    |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                                  |      | 500  |      | mA            |
| $I_{scp}$             | Short circuit peak current |                                                                     |      | 3    |      | A             |

**Table 7. Electrical characteristics of L78S12** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 19\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                     | Min. | Typ. | Max. | Unit          |
|-----------------------|----------------------------|---------------------------------------------------------------------|------|------|------|---------------|
| $V_O$                 | Output voltage             |                                                                     | 11.5 | 12   | 12.5 | V             |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 14.5\text{V}$                           | 11.4 | 12   | 12.6 | V             |
| $\Delta V_O$          | Line regulation            | $V_I = 14.5\text{ to }30\text{V}$                                   |      |      | 240  | mV            |
|                       |                            | $V_I = 16\text{ to }22\text{V}$                                     |      |      | 120  |               |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }2\text{ A}$                                  |      |      | 160  | mV            |
| $I_d$                 | Quiescent current          |                                                                     |      |      | 8    | mA            |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{ A}$                                   |      |      | 0.5  | mA            |
|                       |                            | $V_I = 14.5\text{ to }30\text{ V}$ , $I_O = 20\text{mA}$            |      |      | 1    |               |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = -55^\circ\text{C to }150^\circ\text{C}$ |      | -1   |      | mV/°C         |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                  |      | 75   |      | $\mu\text{V}$ |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                           | 53   |      |      | dB            |
| $V_d$                 | Dropout voltage            | $I_O \leq 1.5\text{A}$                                              | 15   |      |      | V             |
| $R_O$                 | Output resistance          | f = 1 KHz                                                           |      | 18   |      | m $\Omega$    |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                                  |      | 500  |      | mA            |
| $I_{scp}$             | Short circuit peak current |                                                                     |      | 3    |      | A             |

**Table 8. Electrical characteristics of L78S15** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 23\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                     | Min.  | Typ. | Max.  | Unit  |
|-----------------------|----------------------------|---------------------------------------------------------------------|-------|------|-------|-------|
| $V_O$                 | Output voltage             |                                                                     | 14.4  | 15   | 15.6  | V     |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 17.5\text{V}$                           | 14.25 | 15   | 15.75 | V     |
| $\Delta V_O$          | Line regulation            | $V_I = 17.5\text{ to }30\text{V}$                                   |       |      | 300   | mV    |
|                       |                            | $V_I = 20\text{ to }26\text{V}$                                     |       |      | 150   |       |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }2\text{ A}$                                  |       |      | 180   | mV    |
| $I_d$                 | Quiescent current          |                                                                     |       |      | 8     | mA    |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{ A}$                                   |       |      | 0.5   | mA    |
|                       |                            | $V_I = 17.5\text{ to }30\text{ V}$ , $I_O = 20\text{mA}$            |       |      | 1     |       |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = -55^\circ\text{C to }150^\circ\text{C}$ |       | -1   |       | mV/°C |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                  |       | 90   |       | μV    |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                           | 52    |      |       | dB    |
| $V_d$                 | Dropout voltage            | $I_O \leq 1.5\text{A}$                                              | 18    |      |       | V     |
| $R_O$                 | Output resistance          | f = 1 KHz                                                           |       | 19   |       | mΩ    |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                                  |       | 500  |       | mA    |
| $I_{scp}$             | Short circuit peak current |                                                                     |       | 3    |       | A     |

**Table 9. Electrical characteristics of L78S18** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 26\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                     | Min. | Typ. | Max. | Unit  |
|-----------------------|----------------------------|---------------------------------------------------------------------|------|------|------|-------|
| $V_O$                 | Output voltage             |                                                                     | 17.1 | 18   | 18.9 | V     |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 20.5\text{V}$                           | 17   | 18   | 19   | V     |
| $\Delta V_O$          | Line regulation            | $V_I = 20.5\text{ to }30\text{V}$                                   |      |      | 360  | mV    |
|                       |                            | $V_I = 22\text{ to }28\text{V}$                                     |      |      | 180  |       |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }2\text{ A}$                                  |      |      | 200  | mV    |
| $I_d$                 | Quiescent current          |                                                                     |      |      | 8    | mA    |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{ A}$                                   |      |      | 0.5  | mA    |
|                       |                            | $V_I = 20.5\text{ to }30\text{ V}$ , $I_O = 20\text{mA}$            |      |      | 1    |       |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = -55^\circ\text{C to }150^\circ\text{C}$ |      | -1   |      | mV/°C |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                  |      | 110  |      | μV    |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                           | 49   |      |      | dB    |
| $V_d$                 | Dropout voltage            | $I_O \leq 1.5\text{A}$                                              | 21   |      |      | V     |
| $R_O$                 | Output resistance          | f = 1 KHz                                                           |      | 22   |      | mΩ    |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                                  |      | 500  |      | mA    |
| $I_{scp}$             | Short circuit peak current |                                                                     |      | 3    |      | A     |

**Table 10. Electrical characteristics of L78S24** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 33\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                     | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|---------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                     | 23   | 24   | 25   | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 27\text{V}$                             | 22.8 | 24   | 25.2 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 27\text{ to }38\text{V}$                                     |      |      | 480  | mV                   |
|                       |                            | $V_I = 30\text{ to }36\text{V}$                                     |      |      | 240  |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }2\text{ A}$                                  |      |      | 250  | mV                   |
| $I_d$                 | Quiescent current          |                                                                     |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{ A}$                                   |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 27\text{ to }38\text{ V}$ , $I_O = 20\text{mA}$              |      |      | 1    |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = -55^\circ\text{C to }150^\circ\text{C}$ |      | -1.5 |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                  |      | 170  |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                           | 48   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1.5\text{A}$                                              | 27   |      |      | V                    |
| $R_O$                 | Output resistance          | f = 1 KHz                                                           |      | 23   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                                  |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                     |      | 3    |      | A                    |

**Table 11. Electrical characteristics of L78S05C** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 10\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                   | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|-------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                   | 4.8  | 5    | 5.2  | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 7\text{ V}$                           | 4.75 | 5    | 5.25 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 7\text{ to }25\text{ V}$                                   |      |      | 100  | mV                   |
|                       |                            | $V_I = 8\text{ to }25\text{ V}$                                   |      |      | 50   |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }1.5\text{ A}$                              |      |      | 100  | mV                   |
|                       |                            | $I_O = 2\text{ A}$                                                |      | 80   |      |                      |
| $I_d$                 | Quiescent current          |                                                                   |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{ mA to }1\text{ A}$                                |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 7\text{ to }25\text{ V}$ , $I_O = 20\text{ mA}$            |      |      | 1.3  |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{ mA}$ , $T_J = 0^\circ\text{C to }70^\circ\text{C}$ |      | -1.1 |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                |      | 40   |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                         | 54   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{ A}$                                             | 8    |      |      | V                    |
| $R_O$                 | Output resistance          | f = 1 KHz                                                         |      | 17   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{ V}$                                               |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                   |      | 3    |      | A                    |

**Table 12. Electrical characteristics of L78S75C** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 12.5\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                  | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                  | 7.15 | 7.5  | 7.9  | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 9.5\text{V}$                         | 7.1  | 7.5  | 7.95 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 9.5\text{ to }25\text{V}$                                 |      |      | 120  | mV                   |
|                       |                            | $V_I = 10.5\text{ to }20\text{V}$                                |      |      | 60   |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }1.5\text{A}$                              |      |      | 140  | mV                   |
|                       |                            | $I_O = 2\text{A}$                                                |      | 100  |      |                      |
| $I_d$                 | Quiescent current          |                                                                  |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{A}$                                 |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 9.5\text{ to }25\text{ V}$ , $I_O = 20\text{mA}$          |      |      | 1.3  |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = 0^\circ\text{C to }70^\circ\text{C}$ |      | -0.8 |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                               |      | 52   |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                        | 48   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{A}$                                             | 10.5 |      |      | V                    |
| $R_O$                 | Output resistance          | f = 1 KHz                                                        |      | 16   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                               |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                  |      | 3    |      | A                    |

**Table 13. Electrical characteristics of L78S09C** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 14\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                   | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|-------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                   | 8.65 | 9    | 9.35 | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 11\text{ V}$                          | 8.6  | 9    | 9.4  | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 11\text{ to }25\text{ V}$                                  |      |      | 130  | mV                   |
|                       |                            | $V_I = 11\text{ to }20\text{ V}$                                  |      |      | 65   |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }1.5\text{ A}$                              |      |      | 170  | mV                   |
|                       |                            | $I_O = 2\text{ A}$                                                |      | 100  |      |                      |
| $I_d$                 | Quiescent current          |                                                                   |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{ mA to }1\text{ A}$                                |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 11\text{ to }25\text{ V}$ , $I_O = 20\text{ mA}$           |      |      | 1.3  |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{ mA}$ , $T_J = 0^\circ\text{C to }70^\circ\text{C}$ |      | -1   |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                                |      | 60   |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                         | 47   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{ A}$                                             | 12   |      |      | V                    |
| $R_O$                 | Output resistance          | f = 1 KHz                                                         |      | 17   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{ V}$                                               |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                   |      | 3    |      | A                    |

**Table 14. Electrical characteristics of L78S10C** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 15\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                  | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                  | 9.5  | 10   | 10.5 | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 12.5\text{V}$                        | 9.4  | 10   | 10.6 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 12.5\text{ to }30\text{V}$                                |      |      | 200  | mV                   |
|                       |                            | $V_I = 14\text{ to }22\text{V}$                                  |      |      | 100  |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }1.5\text{A}$                              |      |      | 240  | mV                   |
|                       |                            | $I_O = 2\text{A}$                                                |      | 150  |      |                      |
| $I_d$                 | Quiescent current          |                                                                  |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{A}$                                 |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 12.5\text{ to }30\text{ V}$ , $I_O = 20\text{mA}$         |      |      | 1    |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = 0^\circ\text{C to }70^\circ\text{C}$ |      | -1   |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                               |      | 65   |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                        | 47   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{A}$                                             | 13   |      |      | V                    |
| $R_O$                 | Output resistance          | f = 1 KHz                                                        |      | 17   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                               |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                  |      | 3    |      | A                    |

**Table 15. Electrical characteristics of L78S12C** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 19\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                  | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                  | 11.5 | 12   | 12.5 | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{A}$ , $V_I = 14.5\text{V}$                         | 11.4 | 12   | 12.6 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 14.5\text{ to }30\text{V}$                                |      |      | 240  | mV                   |
|                       |                            | $V_I = 16\text{ to }22\text{V}$                                  |      |      | 120  |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }1.5\text{A}$                              |      |      | 240  | mV                   |
|                       |                            | $I_O = 2\text{A}$                                                |      | 150  |      |                      |
| $I_d$                 | Quiescent current          |                                                                  |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{A}$                                 |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 14.5\text{ to }30\text{ V}$ , $I_O = 20\text{mA}$         |      |      | 1    |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = 0^\circ\text{C to }70^\circ\text{C}$ |      | -1   |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | B = 10Hz to 100KHz                                               |      | 75   |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | f = 120Hz                                                        | 47   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{A}$                                             | 15   |      |      | V                    |
| $R_O$                 | Output resistance          | f = 1 KHz                                                        |      | 18   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                               |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                  |      | 3    |      | A                    |

**Table 16. Electrical characteristics of L78S15C** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 23\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                  | Min.  | Typ. | Max.  | Unit                 |
|-----------------------|----------------------------|------------------------------------------------------------------|-------|------|-------|----------------------|
| $V_O$                 | Output voltage             |                                                                  | 14.4  | 15   | 15.6  | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{A}$ , $V_I = 17.5\text{V}$                         | 14.25 | 15   | 15.75 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 17.5\text{ to }30\text{V}$                                |       |      | 300   | mV                   |
|                       |                            | $V_I = 20\text{ to }26\text{V}$                                  |       |      | 150   |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }1.5\text{A}$                              |       |      | 300   | mV                   |
|                       |                            | $I_O = 2\text{A}$                                                |       | 150  |       |                      |
| $I_d$                 | Quiescent current          |                                                                  |       |      | 8     | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{A}$                                 |       |      | 0.5   | mA                   |
|                       |                            | $V_I = 17.5\text{ to }30\text{ V}$ , $I_O = 20\text{mA}$         |       |      | 1     |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = 0^\circ\text{C to }70^\circ\text{C}$ |       | -1   |       | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | $B = 10\text{Hz to }100\text{KHz}$                               |       | 90   |       | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | $f = 120\text{Hz}$                                               | 46    |      |       | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{A}$                                             | 18    |      |       | V                    |
| $R_O$                 | Output resistance          | $f = 1\text{ KHz}$                                               |       | 19   |       | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                               |       | 500  |       | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                  |       | 3    |       | A                    |

**Table 17. Electrical characteristics of L78S18C** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 26\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                  | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                  | 17.1 | 18   | 18.9 | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 20.5\text{V}$                        | 17   | 18   | 19   | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 20.5\text{ to }30\text{V}$                                |      |      | 360  | mV                   |
|                       |                            | $V_I = 22\text{ to }28\text{V}$                                  |      |      | 180  |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }1.5\text{A}$                              |      |      | 360  | mV                   |
|                       |                            | $I_O = 2\text{A}$                                                |      | 200  |      |                      |
| $I_d$                 | Quiescent current          |                                                                  |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{A}$                                 |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 20.5\text{ to }30\text{ V}$ , $I_O = 20\text{mA}$         |      |      | 1    |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = 0^\circ\text{C to }70^\circ\text{C}$ |      | -1   |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | $B = 10\text{Hz to }100\text{KHz}$                               |      | 110  |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | $f = 120\text{Hz}$                                               | 43   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{A}$                                             | 21   |      |      | V                    |
| $R_O$                 | Output resistance          | $f = 1\text{ KHz}$                                               |      | 22   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                               |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                  |      | 3    |      | A                    |

**Table 18. Electrical characteristics of L78S24C** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $V_I = 33\text{V}$ ,  $I_O = 500\text{ mA}$ , unless otherwise specified)

| Symbol                | Parameter                  | Test conditions                                                  | Min. | Typ. | Max. | Unit                 |
|-----------------------|----------------------------|------------------------------------------------------------------|------|------|------|----------------------|
| $V_O$                 | Output voltage             |                                                                  | 23   | 24   | 25   | V                    |
| $V_O$                 | Output voltage             | $I_O = 1\text{ A}$ , $V_I = 27\text{V}$                          | 22.8 | 24   | 25.2 | V                    |
| $\Delta V_O$          | Line regulation            | $V_I = 27\text{ to }38\text{V}$                                  |      |      | 480  | mV                   |
|                       |                            | $V_I = 30\text{ to }36\text{V}$                                  |      |      | 240  |                      |
| $\Delta V_O$          | Load regulation            | $I_O = 20\text{ mA to }1.5\text{A}$                              |      |      | 480  | mV                   |
|                       |                            | $I_O = 2\text{A}$                                                |      | 300  |      |                      |
| $I_d$                 | Quiescent current          |                                                                  |      |      | 8    | mA                   |
| $\Delta I_d$          | Quiescent current change   | $I_O = 20\text{mA to }1\text{A}$                                 |      |      | 0.5  | mA                   |
|                       |                            | $V_I = 27\text{ to }38\text{ V}$ , $I_O = 20\text{mA}$           |      |      | 1    |                      |
| $\Delta V_O/\Delta T$ | Output voltage drift       | $I_O = 5\text{mA}$ , $T_J = 0^\circ\text{C to }70^\circ\text{C}$ |      | -1.5 |      | mV/ $^\circ\text{C}$ |
| eN                    | Output noise voltage       | $B = 10\text{Hz to }100\text{KHz}$                               |      | 170  |      | $\mu\text{V}$        |
| SVR                   | Supply voltage rejection   | $f = 120\text{Hz}$                                               | 42   |      |      | dB                   |
| $V_d$                 | Dropout voltage            | $I_O \leq 1\text{A}$                                             | 27   |      |      | V                    |
| $R_O$                 | Output resistance          | $f = 1\text{ KHz}$                                               |      | 28   |      | m $\Omega$           |
| $I_{sc}$              | Short circuit current      | $V_I = 27\text{V}$                                               |      | 500  |      | mA                   |
| $I_{scp}$             | Short circuit peak current |                                                                  |      | 3    |      | A                    |

## 5 Typical performance

Figure 7. Dropout voltage vs junction temperature

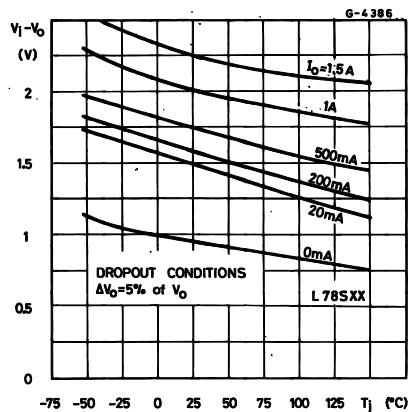


Figure 8. Peak output current vs input/output differential voltage

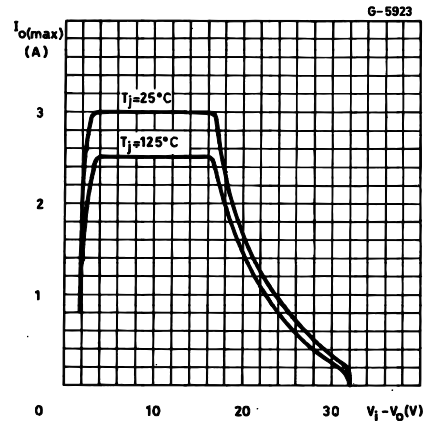


Figure 9. Output impedance vs frequency

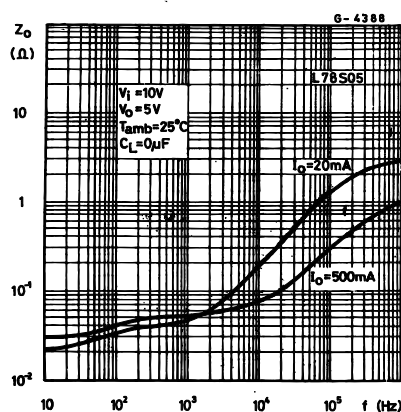


Figure 10. Output voltage vs junction temperature

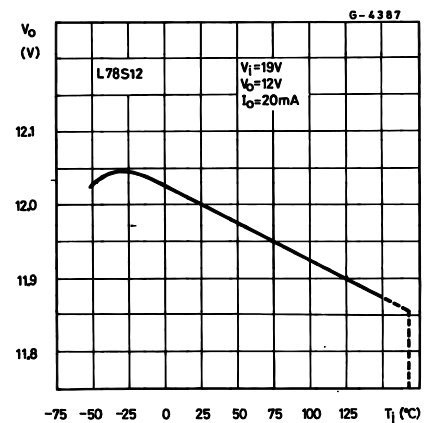


Figure 11. Supply voltage rejection vs frequency

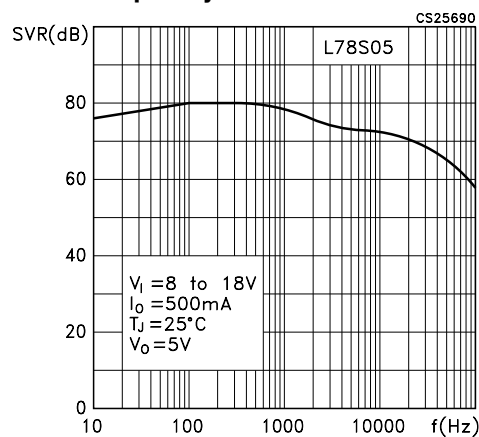


Figure 12. Quiescent current vs junction temperature

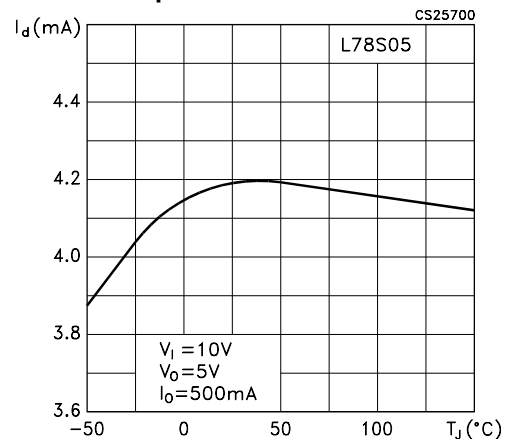


Figure 13. Load transient response

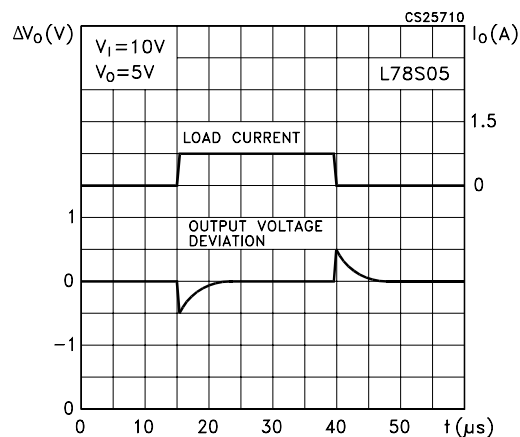


Figure 14. Line transient response

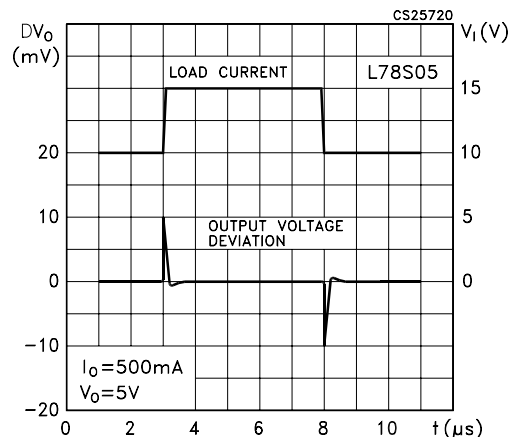
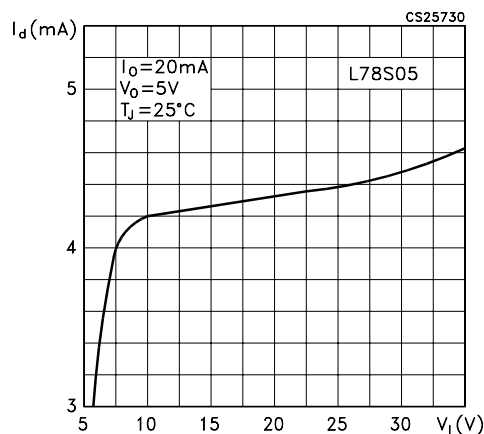
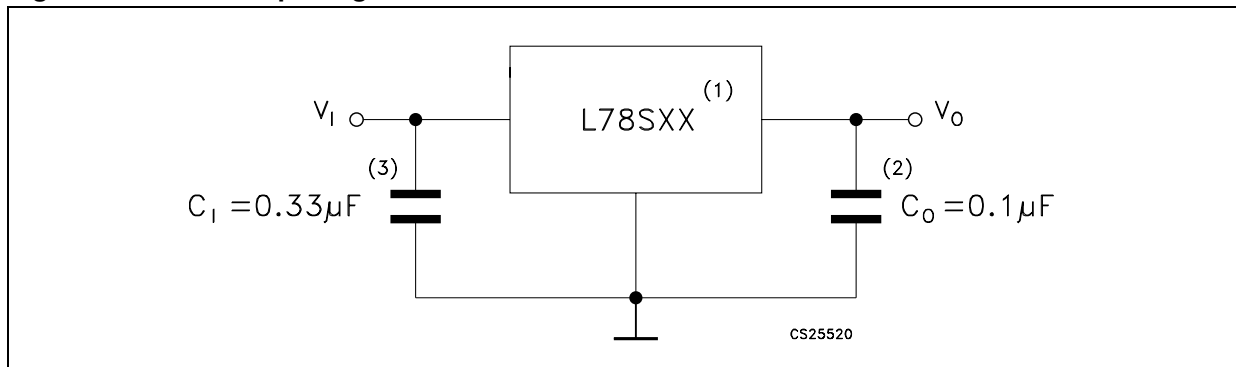


Figure 15. Quiescent current vs input voltage



**Figure 16. Fixed output regulator**

1. To specify an output voltage, substitute voltage value for "XX".
2. Although no output capacitor is need for stability, it does improve transient response.
3. Required if regulator is locate an appreciable distance from power supply filter.

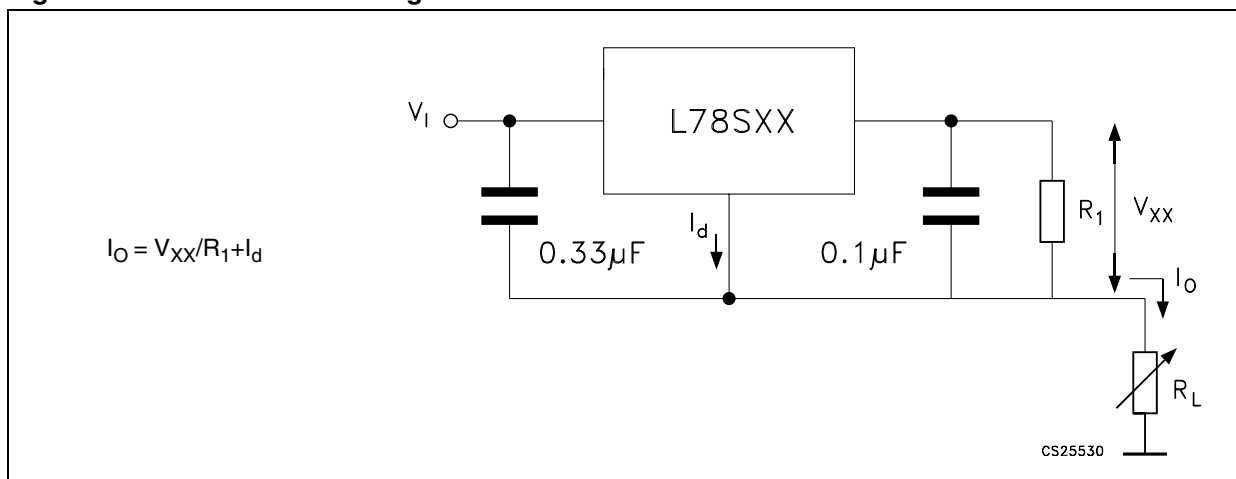
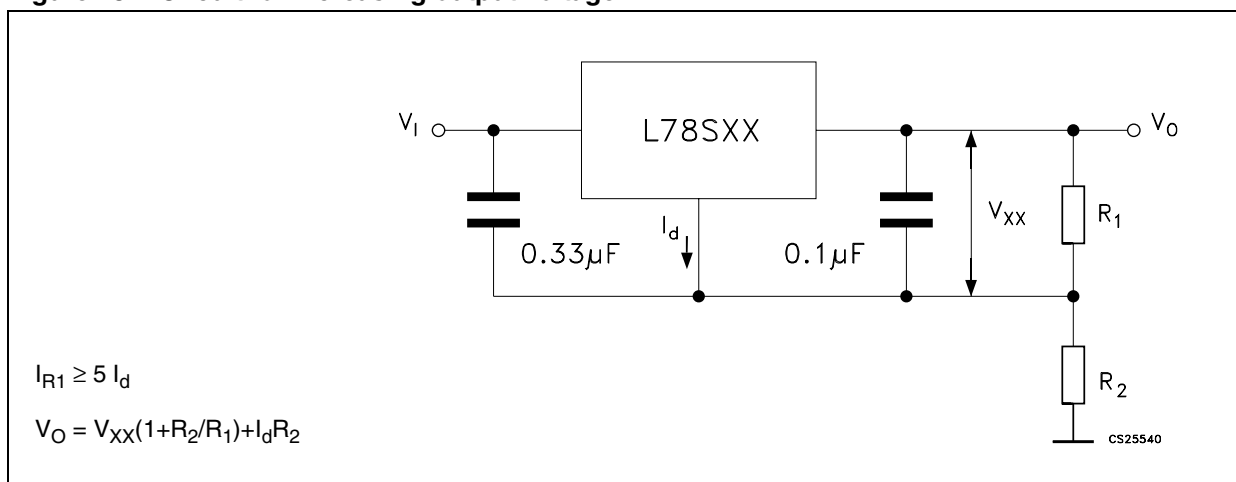
**Figure 17. Constant current regulator****Figure 18. Circuit for increasing output voltage**

Figure 19. Adjustable output regulator (7 to 30V)

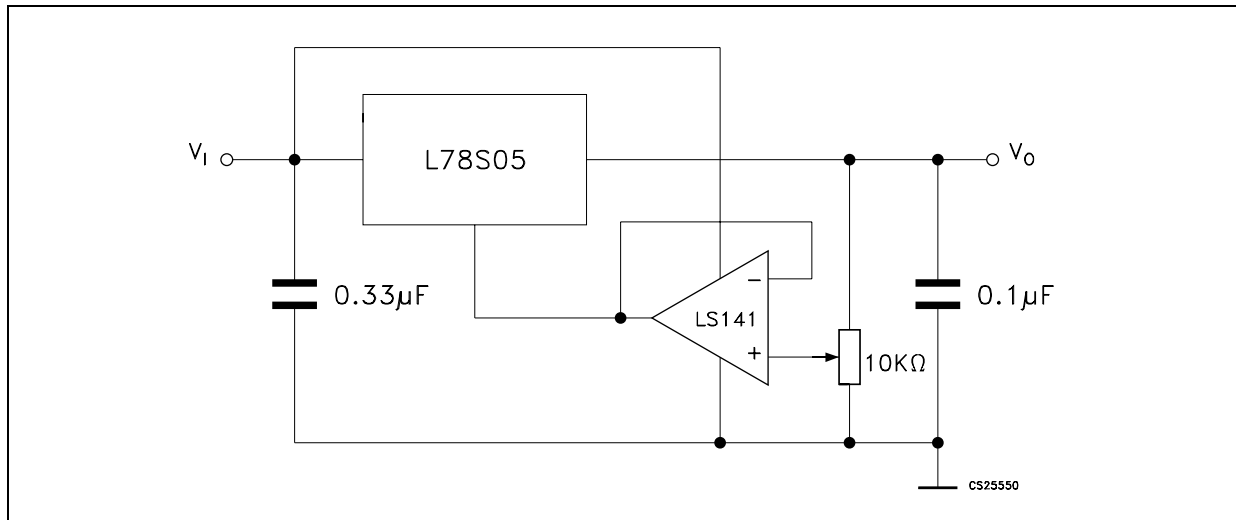


Figure 20. 0.5 to 10V Regulator

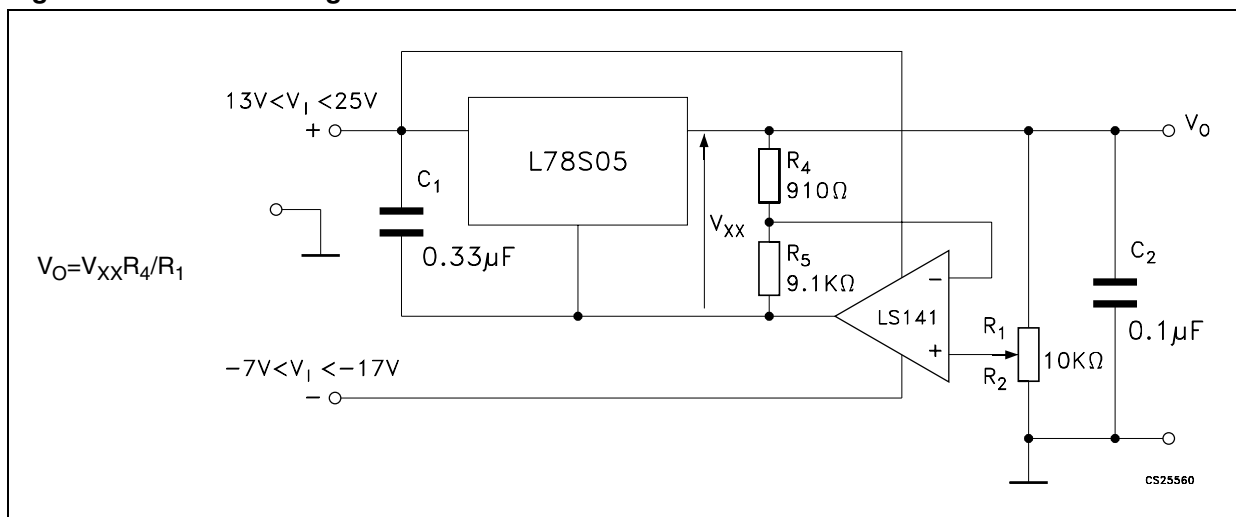


Figure 21. High current voltage regulator


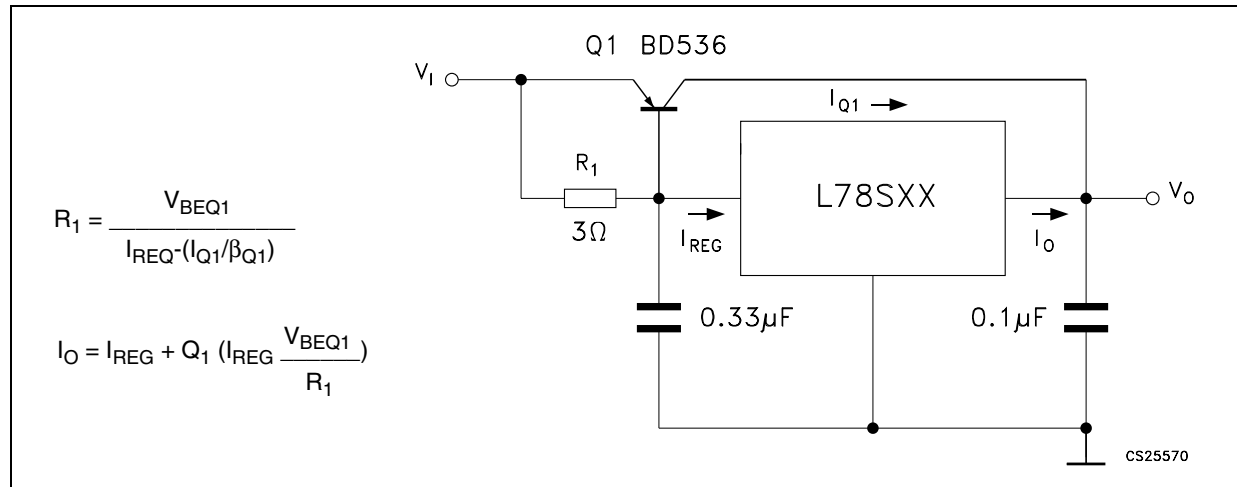


Figure 22. High output current with short circuit protection

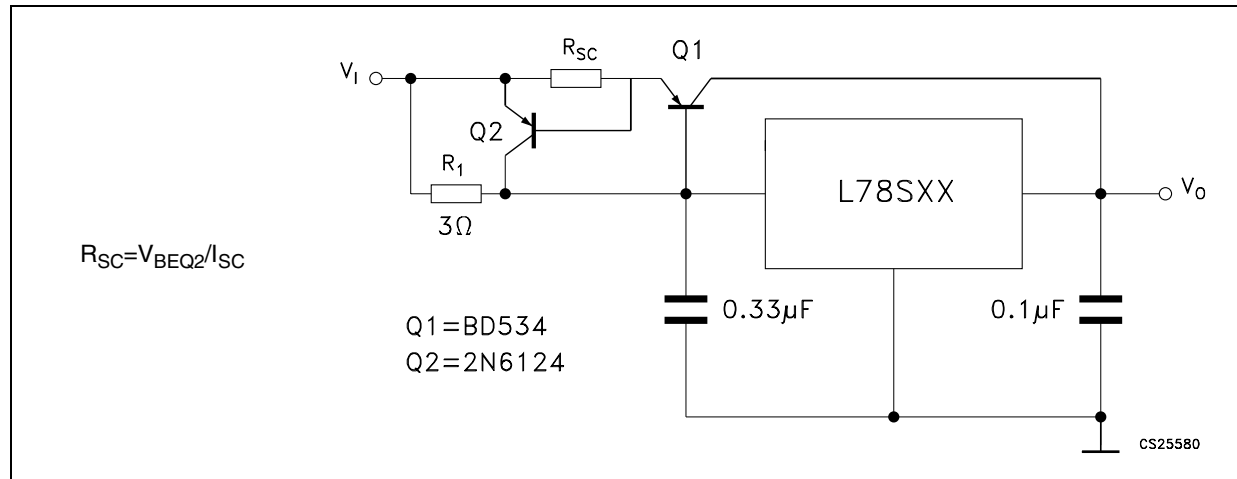

The circuit diagram shows a precision half-wave rectifier. The input  $V_I$  is connected to the non-inverting input (+) of an L78SXX voltage follower. The output of the L78SXX is connected to the inverting input (-) of an LS141 op-amp. The op-amp's non-inverting input (+) is grounded. The op-amp's output is connected to the output  $V_O$  through a  $4.7\text{K}\Omega$  resistor. A  $0.33\mu\text{F}$  capacitor is connected between the input  $V_I$  and ground. A  $0.1\mu\text{F}$  capacitor is connected between the output of the L78SXX and ground. The output  $V_O$  is also connected to ground through a  $4.7\text{K}\Omega$  resistor. The input  $V_I$  is also connected to ground through a  $4.7\text{K}\Omega$  resistor. The output  $V_O$  is also connected to ground through a  $4.7\text{K}\Omega$  resistor. The circuit is powered by a  $2\text{N}6124$  diode connected between the input  $V_I$  and the output  $V_O$ .

The diagram shows a transformer with a center tap connected to ground. The two secondary windings are each connected to a bridge rectifier. The positive output of the first rectifier is connected to pin 1 of an L78SXX regulator. Pin 2 of the regulator is connected to the positive output terminal, labeled  $+V_o$ . Pin 3 is connected to the center tap. A  $0.1\mu F$  capacitor is connected between pins 2 and 3. The negative output of the second rectifier is connected to pin 1 of a second L78SXX regulator. Pin 2 of this regulator is connected to the negative output terminal, labeled  $-V_o$ . Pin 3 is connected to the center tap. A  $0.1\mu F$  capacitor is connected between pins 2 and 3. The output voltage across the load is indicated as  $V_o$  (from  $+V_o$  to  $-V_o$ ). The transformer is labeled S-4107.

Figure 25. Negative output voltage circuit

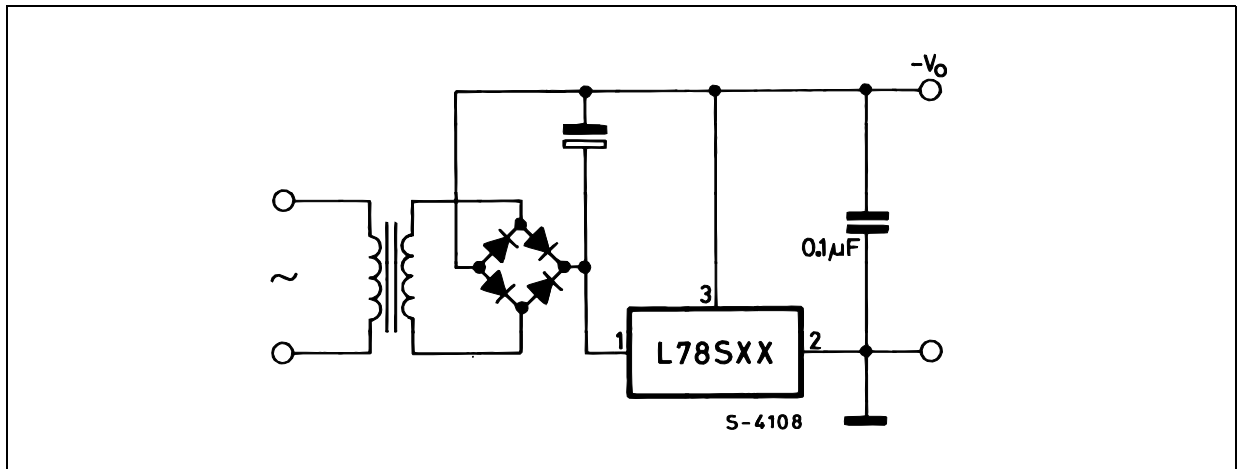


Figure 26. Switching regulator

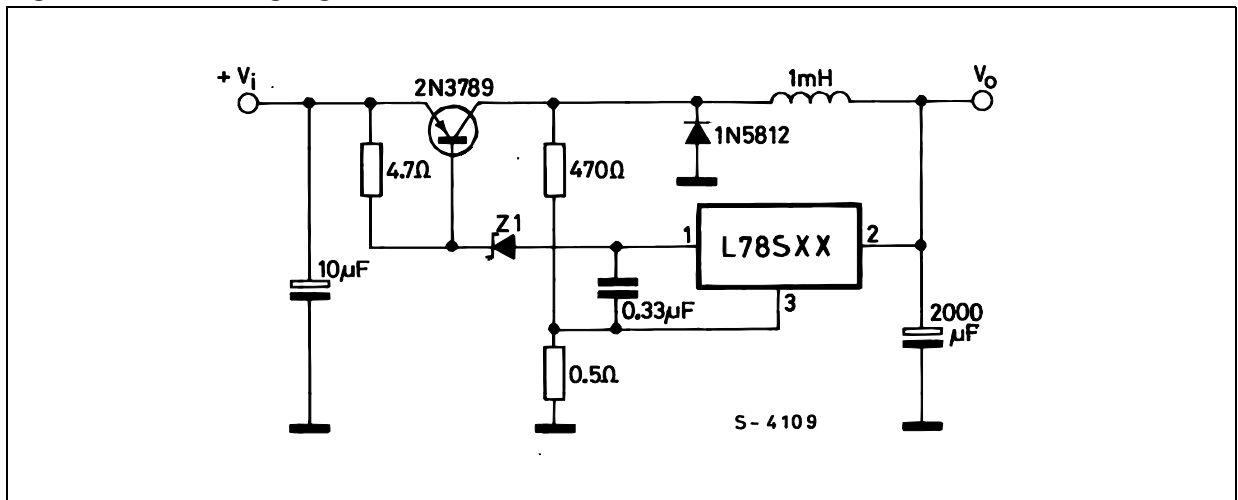


Figure 27. High input voltage circuit

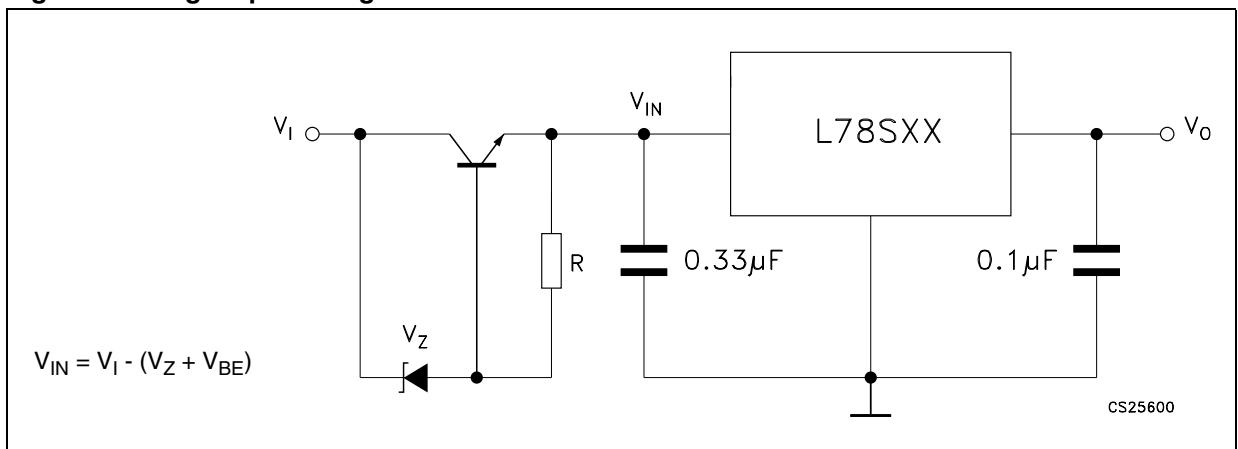


Figure 28. High input voltage circuit

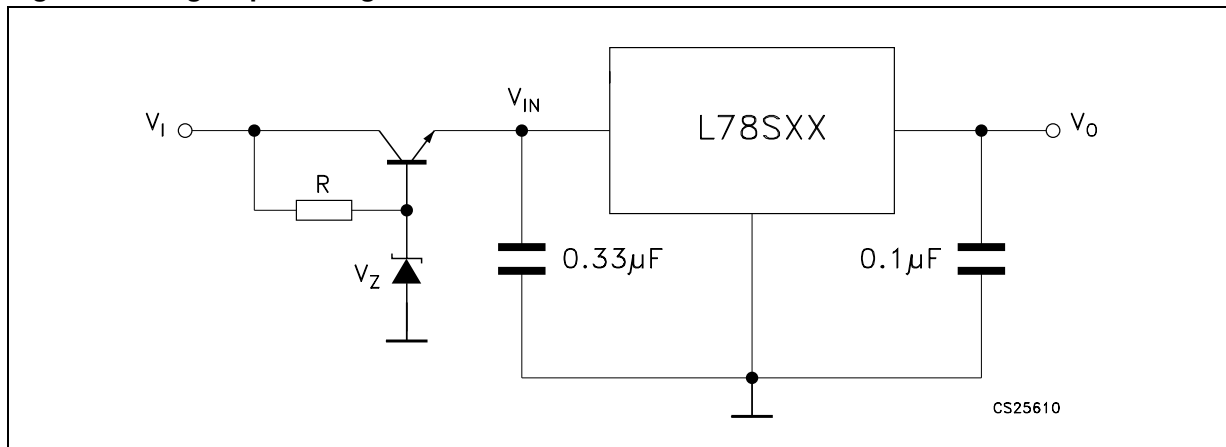


Figure 29. High output voltage regulator

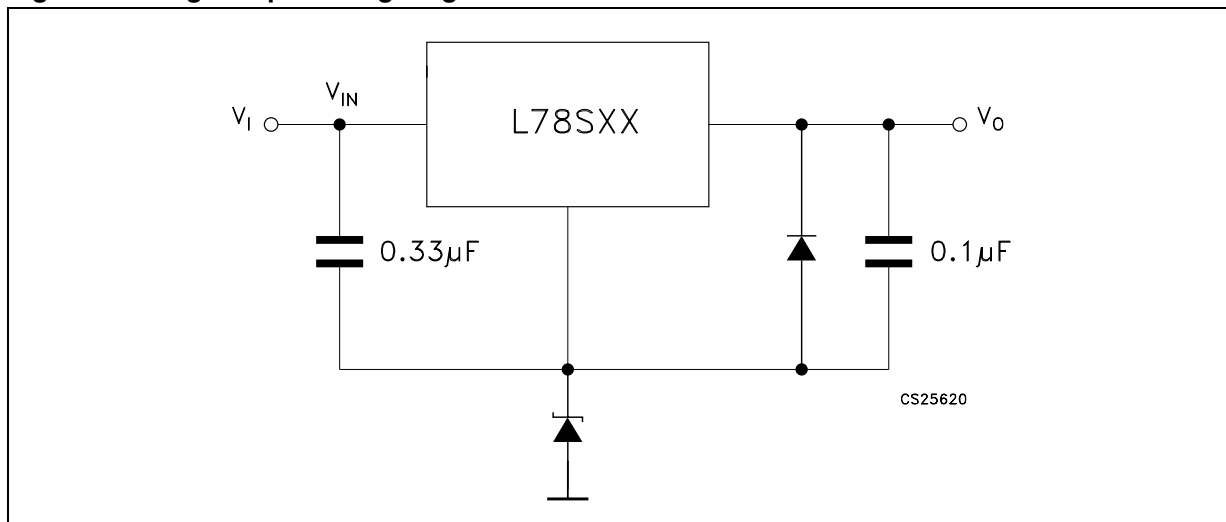
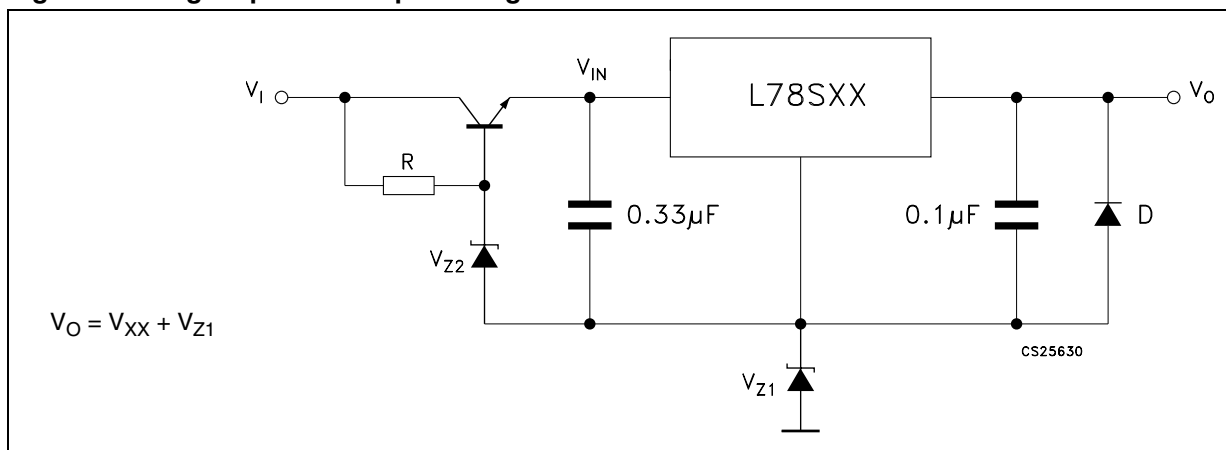
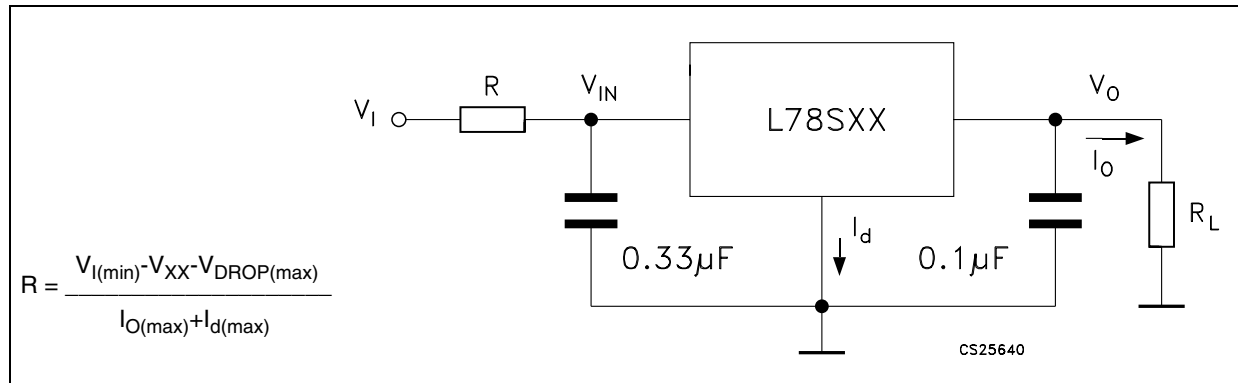
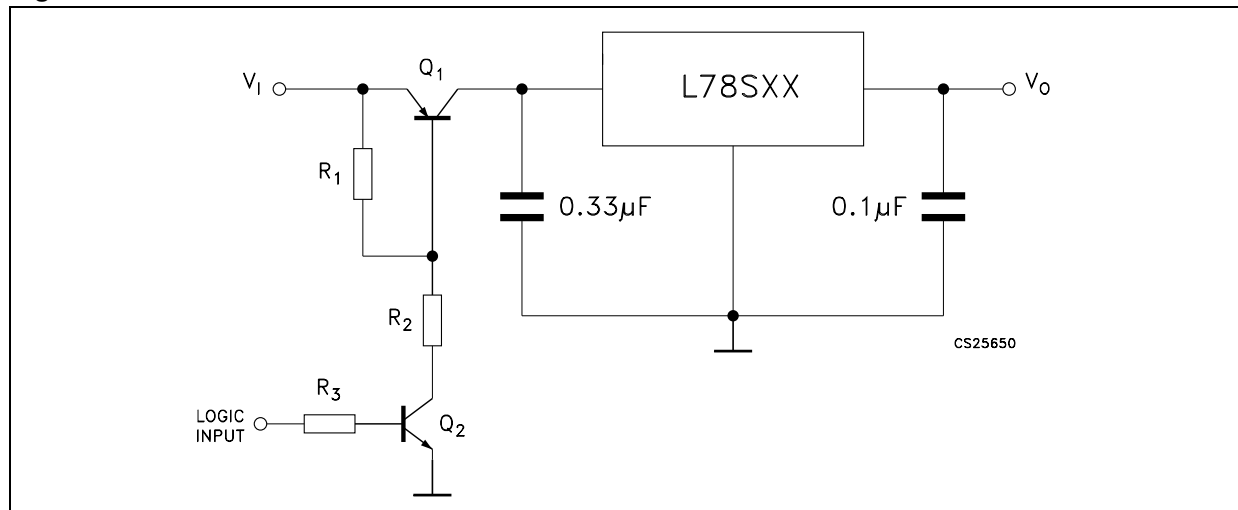
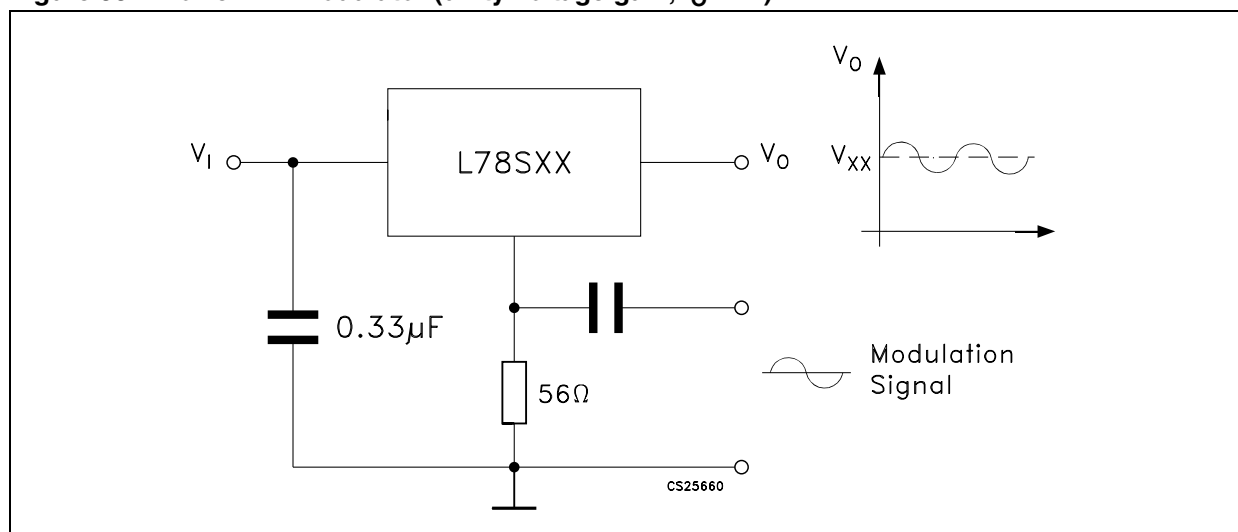



Figure 30. High input and output voltage




**Figure 31. Reducing power dissipation with dropping resistor****Figure 32. Remote shutdown****Figure 33. Power AM modulator (unity voltage gain,  $I_O \leq 1A$ )**


**Note:** The circuit performs well up to 100 KHz.

Figure 34. Adjustable output voltage with temperature compensation

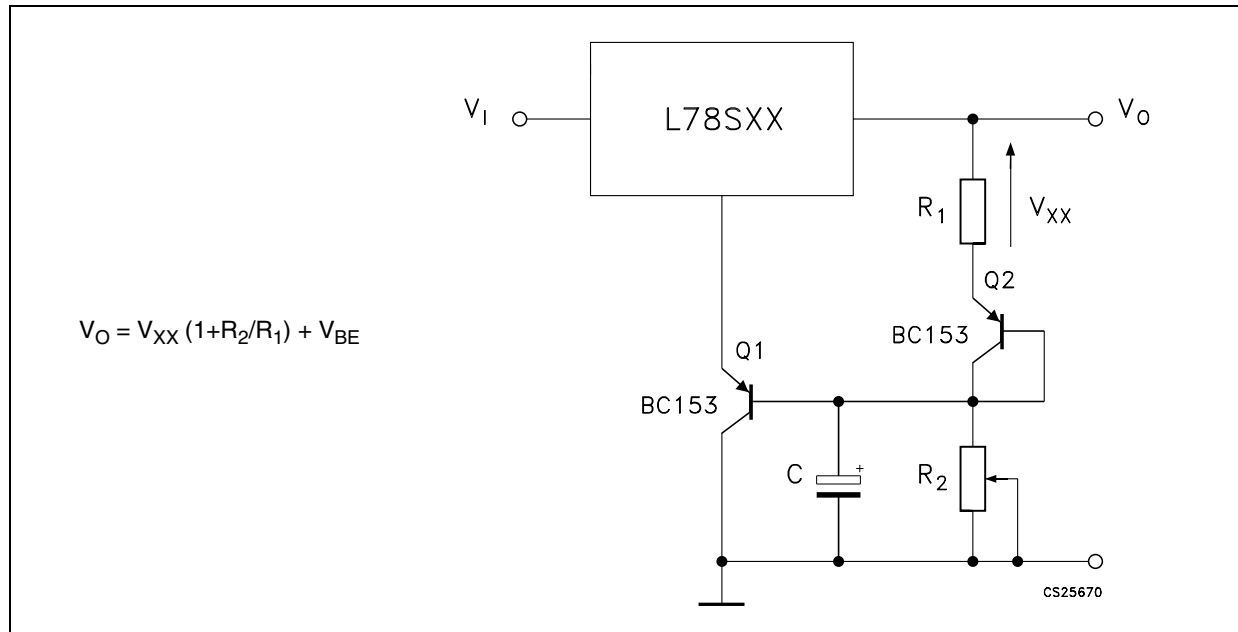

Note:  $Q_2$  is connected as a diode in order to compensate the variation of the  $Q_1 V_{BE}$  with the temperature.  $C$  allows a slow rise time of the  $V_O$ .

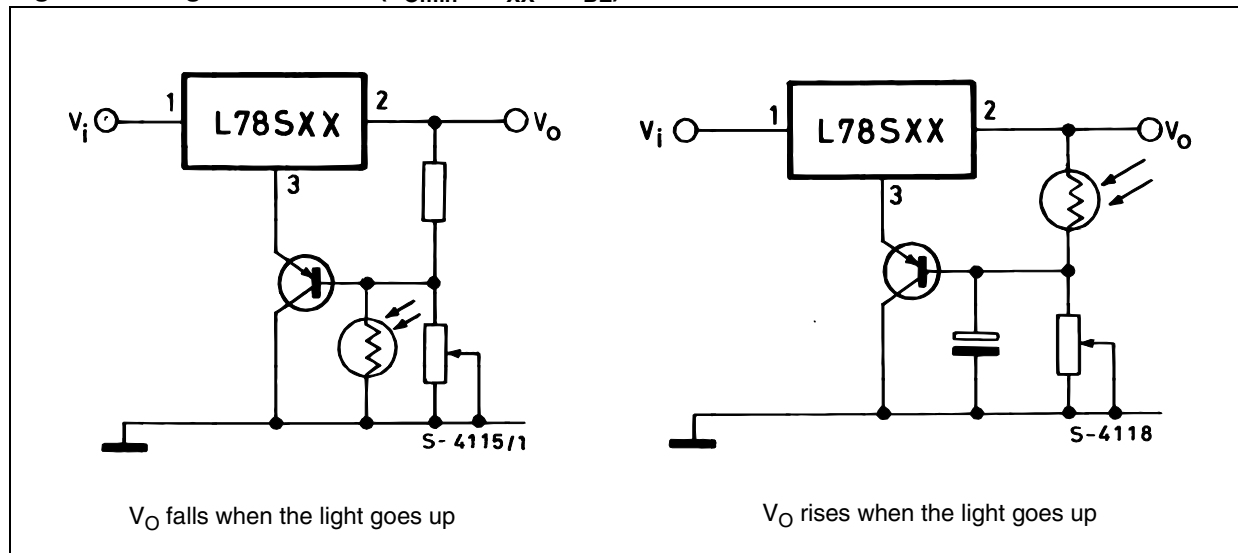Figure 35. Light controllers ( $V_{Omin} = V_{XX} + V_{BE}$ )

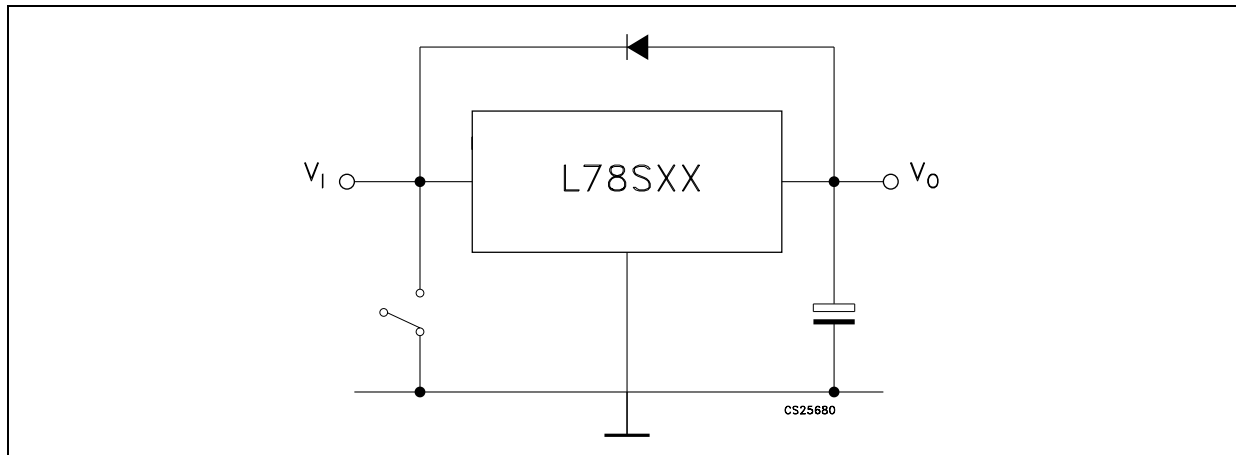**Figure 36. Protection against input short-circuit with high capacitance loads**


1. Application with high capacitance loads and an output voltage greater than 6 volts need an external diode (see fig. 32) to protect the device against input short circuit. In this case the input voltage falls rapidly while the output voltage decrease slowly. The capacitance discharges by means of the Base-Emitter junction of the series pass transistor in the regulator. If the energy is sufficiently high, the transistor may be destroyed. The external diode by-passes the current from the IC to ground.

## 6 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com).


**TO-3 MECHANICAL DATA**

| DIM. | mm.  |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP   | MAX. | MIN.  | TYP.  | MAX.  |
| A    |      | 11.85 |      |       | 0.466 |       |
| B    | 0.96 | 1.05  | 1.10 | 0.037 | 0.041 | 0.043 |
| C    |      |       | 1.70 |       |       | 0.066 |
| D    |      |       | 8.7  |       |       | 0.342 |
| E    |      |       | 20.0 |       |       | 0.787 |
| G    |      | 10.9  |      |       | 0.429 |       |
| N    |      | 16.9  |      |       | 0.665 |       |
| P    |      |       | 26.2 |       |       | 1.031 |
| R    | 3.88 |       | 4.09 | 0.152 |       | 0.161 |
| U    |      |       | 39.5 |       |       | 1.555 |
| V    |      | 30.10 |      |       | 1.185 |       |

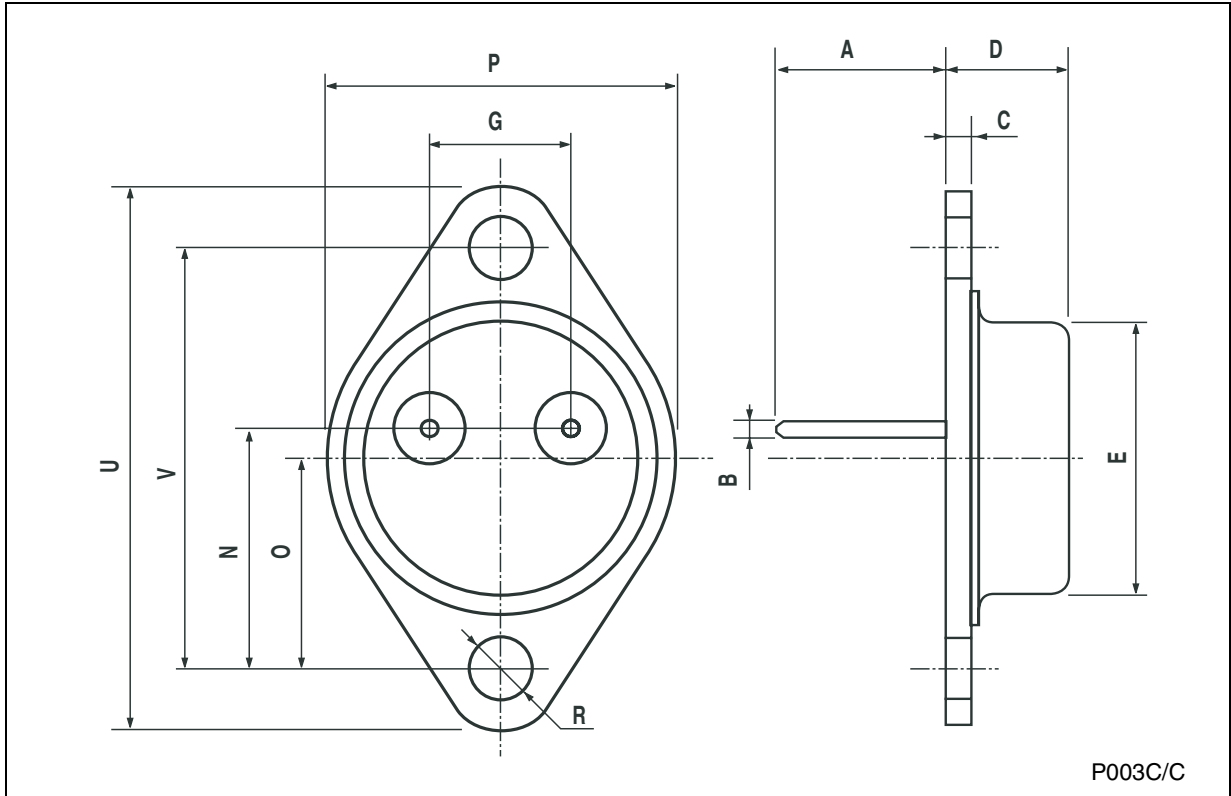

TO-220 MECHANICAL DATA

| DIM. | mm.   |      |       | inch  |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | MIN.  | TYP  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |      | 4.60  | 0.173 |       | 0.181 |
| C    | 1.23  |      | 1.32  | 0.048 |       | 0.051 |
| D    | 2.40  |      | 2.72  | 0.094 |       | 0.107 |
| D1   |       | 1.27 |       |       | 0.050 |       |
| E    | 0.49  |      | 0.70  | 0.019 |       | 0.027 |
| F    | 0.61  |      | 0.88  | 0.024 |       | 0.034 |
| F1   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| F2   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| G    | 4.95  |      | 5.15  | 0.194 |       | 0.203 |
| G1   | 2.4   |      | 2.7   | 0.094 |       | 0.106 |
| H2   | 10.0  |      | 10.40 | 0.393 |       | 0.409 |
| L2   |       | 16.4 |       |       | 0.645 |       |
| L4   | 13.0  |      | 14.0  | 0.511 |       | 0.551 |
| L5   | 2.65  |      | 2.95  | 0.104 |       | 0.116 |
| L6   | 15.25 |      | 15.75 | 0.600 |       | 0.620 |
| L7   | 6.2   |      | 6.6   | 0.244 |       | 0.260 |
| L9   | 3.5   |      | 3.93  | 0.137 |       | 0.154 |
| DIA. | 3.75  |      | 3.85  | 0.147 |       | 0.151 |

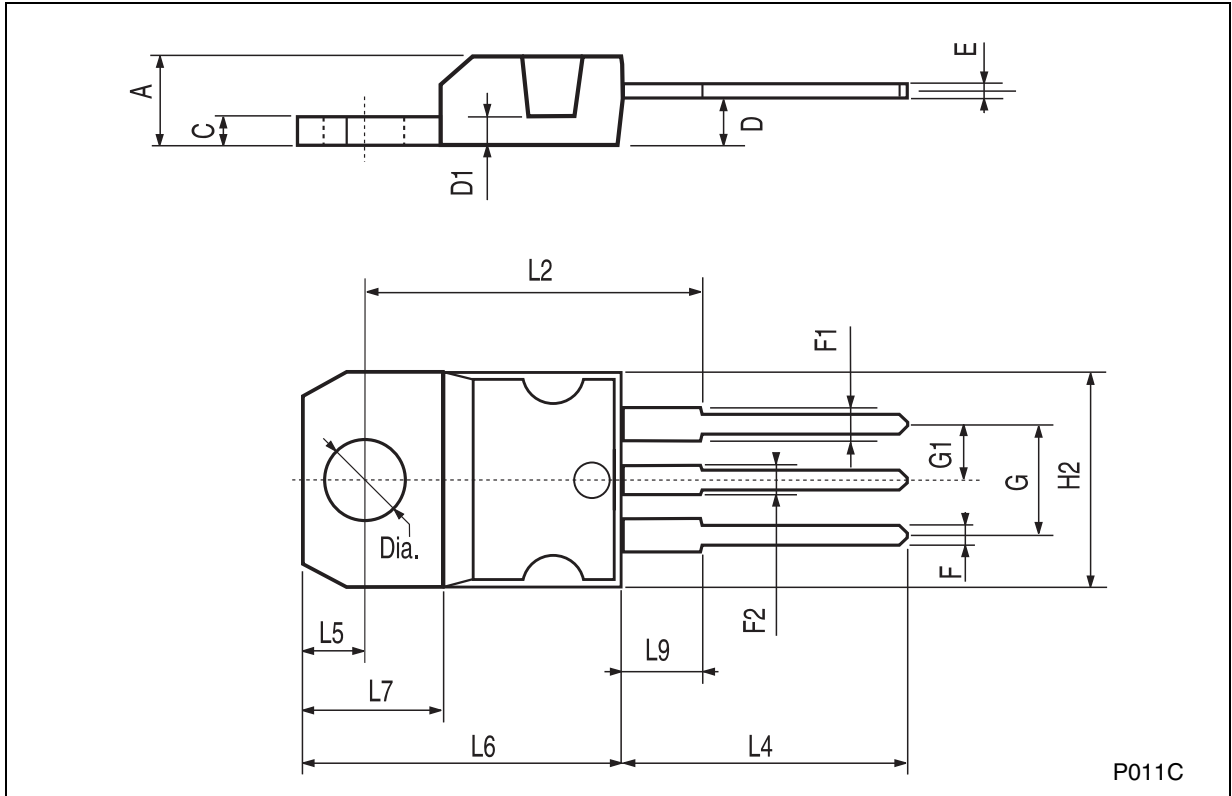

## 7 Order code

Table 19. Order code

| Part numbers | Packaging |                         |                |
|--------------|-----------|-------------------------|----------------|
|              | TO-220    | T0-3                    | Output voltage |
| L78S05       |           | L78S05T <sup>(1)</sup>  | 5 V            |
| L78S05C      | L78S05CV  | L78S05CT <sup>(1)</sup> | 5 V            |
| L78S75       |           | L78S75T <sup>(1)</sup>  | 7.5 V          |
| L78S75C      | L78S75CV  | L78S75CT <sup>(1)</sup> | 7.5 V          |
| L78S09       |           | L78S09T <sup>(1)</sup>  | 9 V            |
| L78S09C      | L78S09CV  |                         | 9 V            |
| L78S10       |           | L78S10T <sup>(1)</sup>  | 10 V           |
| L78S10C      | L78S10CV  | L78S10CT <sup>(1)</sup> | 10 V           |
| L78S12       |           | L78S12T <sup>(1)</sup>  | 12 V           |
| L78S12C      | L78S12CV  | L78S12CT                | 12 V           |
| L78S15       |           | L78S15T <sup>(1)</sup>  | 15 V           |
| L78S15C      | L78S15CV  | L78S15CT                | 15 V           |
| L78S18       |           | L78S18T <sup>(1)</sup>  | 18 V           |
| L78S18C      | L78S18CV  |                         | 18 V           |
| L78S24       |           | L78S24T <sup>(1)</sup>  | 24 V           |
| L78S24C      | L78S24CV  | L78S24CT <sup>(1)</sup> | 24 V           |

1. Available on request.

## 8 Revision history

**Table 20. Revision history**

| Date        | Revision | Changes                                        |
|-------------|----------|------------------------------------------------|
| 07-Sep-2006 | 2        | Order Codes has been updated and new template. |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)